




DNR-F5104LB & DNR-F5108LB 4/8 CHANNEL NETWORK VIDEO RECORDER


KEY FEATURES

- Support Ultra 265/H.265/H.264 video formats
- 4/8-channel input
- Third-party IP cameras supported with ONVIF conformance: Profile S, Profile G, Profile T
- Support 1-ch HDMI, 1-ch VGA
- HDMI and VGA simultaneous output
- Up to 2MP resolution recording
- 1 SATA HDD, up to 10 TB
- Support cloud upgrade

DIMENSIONS



REAR PANEL

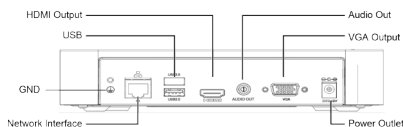

| Model | DNR-F5104LB | DNR-F5108LB |
|---------------------------|---|-------------|
| Video/Audio Input | | |
| IP Video Input | 4-ch | 8-ch |
| Network | | |
| Incoming Bandwidth | 40Mbps | |
| Outgoing Bandwidth | 40Mbps | |
| Remote Users | 128 | |
| Protocols | P2P, UPnP, NTP, DHCP, PPPoE | |
| Video/Audio Output | | |
| HDMI/VGA Output | HDMI: 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz | |
| | VGA: 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz | |
| Recording Resolution | 1080p/960p/720p/D1/2CIF/CIF | |
| Synchronous Playback | 4-ch | 8-ch |
| Corridor Mode Screen | 3/4 | 3/4/5/7/9 |
| Decoding | | |
| Decoding format | Ultra 265/H.265/H.264 | |
| Liveview/Playback | 1080p/960p/720p/D1/2CIF/CIF | |
| Capability | 4 x 1080p@20, 4 x 720p@30 | |
| Hard Disk | | |
| SATA | 1 SATA interface | |
| Capacity | up to 10TB for each disk | |
| External Interface | | |
| Network Interface | 1 RJ45 10M/100M self-adaptive Ethernet Interface | |
| USB Interface | Rear panel: 2 x USB2.0 | |
| General | | |
| Power Supply | 12V DC | |
| | Power Consumption: ≤3.2 W (without HDD) | |
| Working Environment | -10°C~+55°C (+14°F~+131°F), Humidity ≤ 90% RH (non-condensing) | |
| Dimensions (W×D×H) | 205mm × 205mm × 42mm (8.1" × 8.1" × 1.7") | |
| Weight (without HDD) | 0.51kg (1.12lb) | |