



F500-EN8


DISK ENCLOSURE

F500-EN8 with high performance, high reliability, high density, high scalability, is an affordable high-level disk enclosure developed especially for video surveillance.

KEY FEATURES

- High Density**
 The innovative enclosure with 530.4mm depth and 2U height that holds up to 8 disks, is space-saving and applicable to the standard rack-mounted scenarios.
- Power Protection**
 Disk powered sequentially during system startup, protection from impulse current.
- Multistage fan Speed and Energy Saving**
 Fans with multistage speed are configured in the hot-swappable frame in redundancy mode. System power consumption can be balanced intelligently with heat dissipation calculation to ensure low power consumption and stable operation of the system.

DIMENSIONS

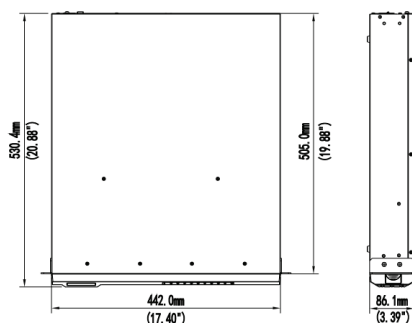

STORAGE	
HDD	8 SATA Interfaces
Disk Capacity	up to 8TB for each disk
EXTERNAL INTERFACE	
Back-end Expansion Interface	1 mini SAS
GENERAL	
Power Supply	100 ~ 240V
Consumption (with HDD)	≤ 100W
Working Environment	-10 °C~ 55 °C 5%-95% RH (non-condensing)
Weight(Without HDD)	< 8 kg (17.6lb)
Dimensions (W×D×H)	442.0 × 530.4 × 86.1mm (17.4" × 20.88" × 3.39")

REAR PANEL



- 1) Grounding Terminal - Equipment grounding
- 2) Power Interface - AC power, 100 V-240 V AC
- 3) Power Switch - Turn on/off device when connected to power
- 4) Mini-SAS Interface - For connection to the host